




INGERSOLL

MANsion House 4882

INGERSOLL LOCKS LTD. 9 Harp Lane, Great Tower Street, London E.C.3.

INGERSOLL "IMPREGNABLE" RIM AUTOMATIC DEADLOCK NO. 71 FOR FRONT AND MAIN DOORS


Combines the Security of a strong Mortice Lock with the convenience of a self-locking Rim Lock

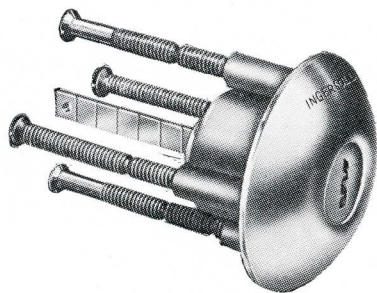

**STEEL CLAD
CYLINDER**


10 pivoted nickel silver levers with stainless steel springs providing unlimited differs. Every lock has a different key combination unless specially ordered alike.

THREE KEYS with each lock.
Cannot be duplicated without owner's authority.

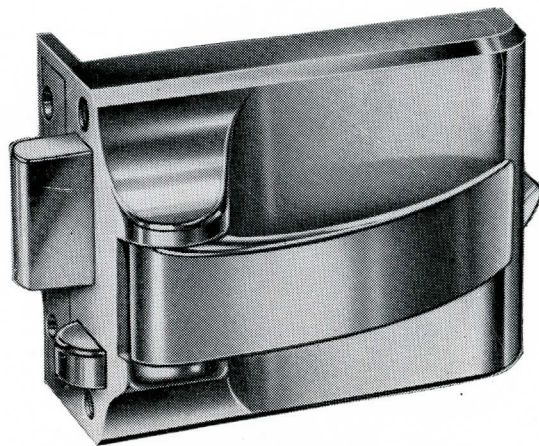


DEADLOCK

Size: $3\frac{1}{2}$ " long by $2\frac{3}{8}$ " high.
The springbolt slides back on contact with bevelled section of staple, and automatically throws reinforced solid metal deadlock into staple slot. Handle can be locked from outside for maximum security.

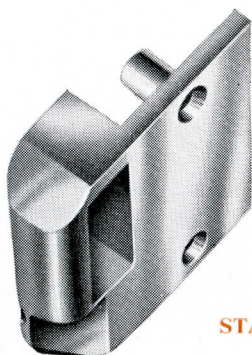


**STANDARD
STAPLE**

Solid staple for all doors opening inwards.

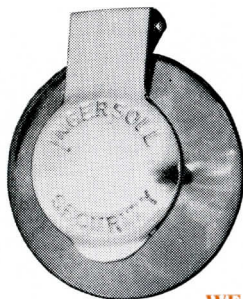

**WEATHER
FLAP**

Protects key mechanism against water and dirt. Particularly recommended where Ingersoll locks are used on security vehicles.

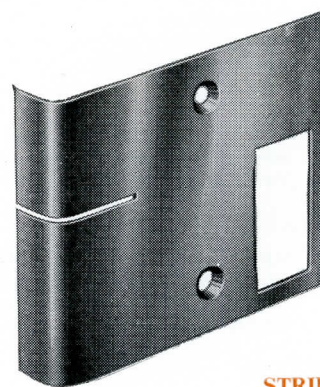

**STRIKING
PLATE**

Steel striking plate for plain doors opening outwards.

Special staples also available for half and full rebated doors opening outwards; state thickness of door and width of rebate when ordering.

**SEE OVER FOR FULL SPECIFICATION
APPROVED BY COUNCIL OF INDUSTRIAL DESIGN**

INGERSOLL

"IMPREGNABLE"

RIM AUTOMATIC

DEADLOCK NO. 71



INGERSOLL

MANsion House 4882

INGERSOLL LOCKS LTD, 9 Harp Lane, Great Tower Street, London E.C.3.

SECURITY FEATURES

- ★ Steel clad 10 lever mechanism defeats drilling, picking and skeleton keys.
- ★ Fixing screws concealed when door is closed.
- ★ Key Registration prevents unauthorised duplication of keys.
- ★ Deadbolt reinforced with two hardened steel pins to prevent cutting.
- ★ Cylinder cover shape resists gripping; concealed lugs prevent rotation by force.
- ★ Handle locked by key from outside.
- ★ Exclusive key combination to every lock (unless specially ordered alike).
- ★ Solid staple with reinforcing peg.
- ★ Approved by Insurance Companies and Police Authorities.
- ★ Combines security of strong mortice lock with convenience of self-locking rim lock; thus saving use of two separate mechanisms.

SPECIFICATION

DEADLOCK

CASE: $3\frac{1}{2}$ " long x $2\frac{3}{8}$ " high. Machine cast Mazak III material.

DEADBOLT: Machine cast Mazak III material, 1" high x $\frac{7}{16}$ " thick with $\frac{5}{16}$ " throw. Reinforced with two hardened steel pins.

SPRINGBOLT: Machine cast Mazak III material, double bevelled to suit doors opening inwards and outwards.

INSIDE HANDLE: Machine cast Mazak III material. Shaped for firm grip and designed for easy action.

BACKSET: $2\frac{3}{8}$ " from key-way to edge of door.

FINISH: Polished Chrome, Satylite, Florentine Bronze, or special plated finishes, and stainless steel.

OPERATION: Automatic deadlocking. Key operated from outside only. Handle locked by one complete clockwise turn of key from the outside. Catch to put deadbolt out of action.

CYLINDER

Ten lever mechanism common to all Ingersoll Locks gives over one million different combinations. Cylinder steel clad for protection against drilling.

STAPLE

All brass staple incorporating solid reinforcing peg. Withstands more than two tons pressure. Gives greater security than most mortice locks because the fixing is deeply embedded in the door frame.

FIXING

Supplied with all necessary screws and full fixing instructions. Suitable for doors from $1\frac{1}{4}$ " thick with a stile of $3\frac{1}{2}$ " (minimum width). Packing pieces necessary under lock case on inside of door if door less than $1\frac{1}{4}$ " thick. Suitable for doors of either "hand".

INGERSOLL "IMPREGNABLE" NO. 73

Specification exactly as for No. 71 except that handle cannot be locked. For use when considerations of emergency require permanent guarantee of free exit. See separate literature.

KEY REGISTRATION

Registration form enclosed with every lock. Once completed and entered in Ingersoll Lock Register, no one can obtain keys without signed authority of the registered owner. Exclusive key as well as exclusive combination therefore supplied to every Ingersoll Lock owner.

MASTER KEYING

Ingersoll Master Key systems provide the ideal answer where security requirements involve large numbers of locks, and key control becomes dangerously complicated. One Ingersoll key gives control of all locks to which the holder has authorised access. Users of suites include secret nuclear research establishments, large hotels, industrial and business organisations throughout the country, as well as private establishments. All types of Ingersoll Locks can be incorporated, and complex suites are possible without loss of security and convenience.

ALIKE COMBINATIONS

Duplicate locks of all types (rim, mortice and padlocks) for various doors can be supplied with alike combinations.

CHANGE OF COMBINATION

If necessary, combination of an existing lock may be changed and three new keys supplied at reasonable cost.

OTHER INGERSOLL PRODUCTS

See separate literature for mortice locks—padlocks and locking bars—fire security and AP locks—master key suites—window locks and Lok-Eeze special graphite lubricant.

For further information:

INGERSOLL LOCKS LIMITED

9 HARP LANE, GREAT TOWER STREET,
LONDON E.C.3.

Telephone: MANsion House 4882

LOCAL STOCKIST